


# SN-NVR10/01E3/008NSE 8CH 1HDD NVR



## Key features

- Up to 8ch 1080P IP cameras access
- Easy to use Same Interface of GUI/WEB/Client
- 1 SATA hard disk up to 4TB
- 1 RJ45 10M/100M network interface
- Simultaneous HDMI&VGA up to 1080P output
- 2 x 2.0 USB Host
- Smart 1U

## Dimension

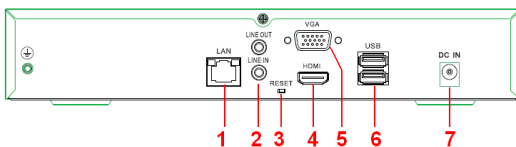

## Interface Introduction

1. Network RJ45 10M/100M
2. Audio I/O
3. Reset
4. HDMI Output
5. VGA Output
6. USB Ports
7. DC Power Supply

## Specifications

VIDEO/AUDIO INPUT	
Video Input	8ch 6MP/5MP/4MP/3MP/1080P/720P/D1
Incoming Bandwidth	48Mbps ,(main stream 36Mbps ,sub stream 12Mbps)
Outgoing Channel	Up to 8ch (Total 36Mbps)
Audio Input	G711_A/G711_U
VIDEO/AUDIO OUTPUT	
Recording Resolution	6MP/5MP/4MP/3MP/1080P/720P/D1
Frame Rate	6MP/5MP/4MP/3MP@15fps,1080P@25fps(PAL),30fps(NTSC);
Live View/Playback Resolution	6MP/5MP/4MP/3MP/1080P/720P/D1
Live View/Playback Capacity	Live View 8ch D1/4ch 1080P, 1ch 6MP/5MP/4MP/3MP Playback 4ch 1080P/720P/D1, 1ch 6MP/5MP/4MP/3MP
HDMI/VGA Output	1920x1080/60Hz,1280x720/60Hz,1024x768/60Hz
Audio Output	1ch,Line out
HARD DISK	
SATA HDD	1 pcs
Mounting Mode	Embedded
Capacity	Up to 4TB for each disk
NETWORK	
Network Interface	1 RJ45 10M/100M network interface
Protocol	RTP/RTCP,TCP/UDP,HTTP,DHCP,DNS,NTP
POE Interface	N/A
POE Max Power	N/A
INTERFACE	
HDMI/VGA	1ch HDMI, 1ch VGA
USB	USB 2.0 x2
Audio I/O	1ch MIC in,1ch audio line out
Alarm I/O	N/A
Reset Button	Yes
GENERAL	
Power Supply	DC 12V ,Max Input 24W
Power Consumption	Max 10W(without HDD,USB)
Operating Temperature	0℃~+45℃
Operating Humidity	0% - 90% RH
Chassis	Smart 1U
Product Dimensions	255x235x47.5mm
Product Weight	<870g